

## Q Commander 256 & 512




Easy to program and use, 256 & 512 channel DMX lighting control consoles ideal for both moving and generic lighting. In-built personalities assign the features of each automated fixture to a direct access button. Built in trackball, LCD display, RAM card back-up slot and flexilight socket. Available as an 'Extended version' with 16 faders for use as playback sub-masters. All models are priced and supplied with universal (90-260v) Power Supply Units.

### Key Features

- 256 Channels USITT DMX512
- LTP/HTP operation with 'transparency' and 'overlay'
- 512 Scenes
- 64 Chases of 64 steps
- 8 Looks
- 16 Groups
- 16 Automated fixtures
- Fixtures up to 30 Channels
- 16 bit fixture movement
- 8 Complete shows of 500 events
- 100+ Internal Fixture library
- 64 Playback keys
- 8 Pre-programmed chase patterns
- 16 Channel Analogue input
- Multi-level password protection
- Memory backup using PCMCIA card
- Midi compatible
- Internal microphone for audio-sync effects

### Technical Specifications

- Power Supply:
- +15vDC 400mA +Littlite
- Inputs / Outputs:
- Analogue-16 x 0-10vDC
- 25pin D type
- RS232-9pin D type
- Audio-1/4"Jack 775mV
- MIDI -5pin DIN
- (In, Out & Through)
- USITT DMX512 5pin

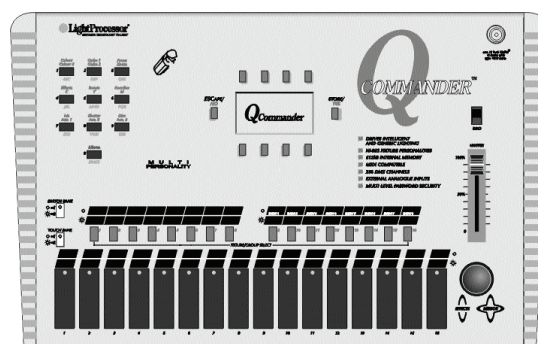

500 x 312 x 120mm

Weight:

5 Kgs.