


Description

The Replica is a partner product to Lightprocessor's QCommander256 controller.

It is designed for use in situations where further programming of the lighting is not envisaged and the requirement is simply to play back previously-recorded programmes, usually in an architectural application such as a museum or retail premises.

Programmes are originated on a QCommander256 and then transferred into the Replica via the PCMCIA memory card supplied. All functions of the QCommander256 are available in the Replica.

Please note: The Replica is not compatible with the QCommander 512

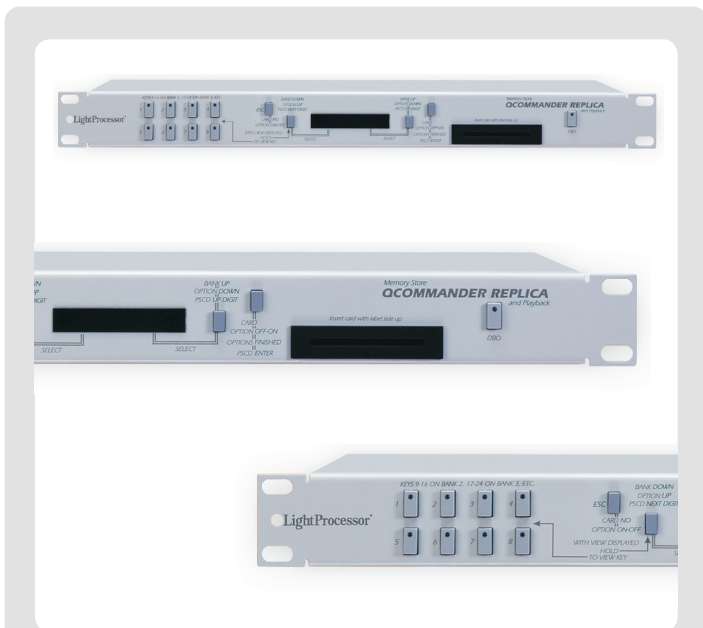

Key Features

- 256 Channels DMX
- 64 Chases of up to 64 steps
- 8 or 16 bit fixture movement
- 8 Shows of up to 500 events
- 64 Internal play back keys over 4 pages
- 16 Channels of analogue inputs. These can be used to play back Individual channels, Keys, Scenes, Chases or Shows.
- MIDI in / thru/ out
- Audio sync via internal microphone or external 1/4" jack.

Technical Specifications

Power Supply	115/230V AC nominal (95-264V AC) Frequency 48-62Hz 80w max.
Power Connector	Supplied with unterminated 3-core mains flex
Control Signals	0 -10 V analogue via female 25-pin D Audio line level via 1/4" stereo jack MIDI in, out and thru via 5-pin DIN
Control Output	USITT DMX512 via XLR 5pin connector, female



Weight: 3.5kg

Dimensions 485 x 230 x 45mm

LIGHTPROCESSOR

20 Greenhill Crescent, Watford Business Park, Watford, Herts, WD18 8JA

T: 01923 698090 F: 01923 698081 E: info@lightprocessor.co.uk www.lightprocessor.co.uk

