

IWB'S

The Doughty® Internally Wired Bar range features a unique extruded side mounted terminal box allowing increased access. Sockets are mounted in tough injection moulded ABS socket boxes.

A full range of sockets is held in stock to ensure an efficient service is maintained. Physical Segregation is available for Data Connections etc.


All IWB's are made to order and we are able to offer a bespoke service to a customer's requirements.

Built and tested to the following standards:

- Low voltage directive (2006/95/EC)
- EN60065
- BS EN60059
- BS 7906-1:2003

Safe working loads:

- 78Kg uniformly distributed between 2 metre suspension points
- 39Kg point load between 2 metre suspension points

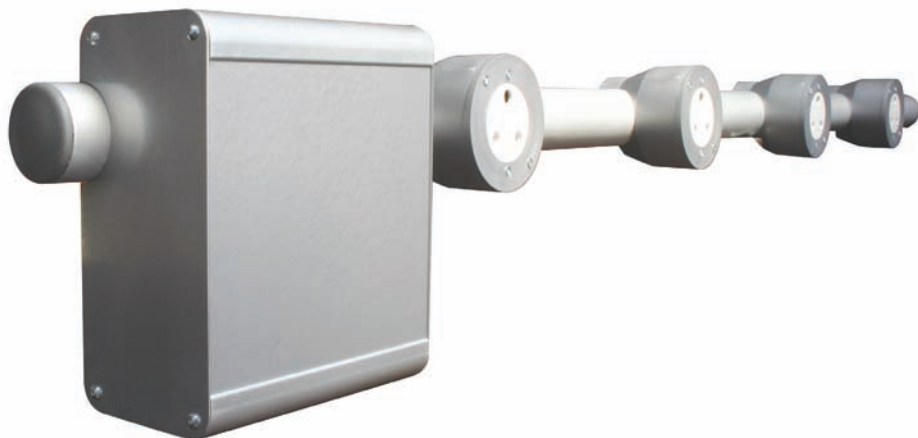



13 Amp Socket



15 Amp Socket




16 Amp Socket



XLR



RJ45

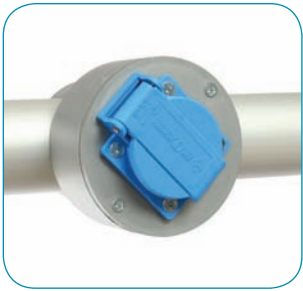

Schuko




Special Boxes



Socapex Termination



Metal Socket Boxes

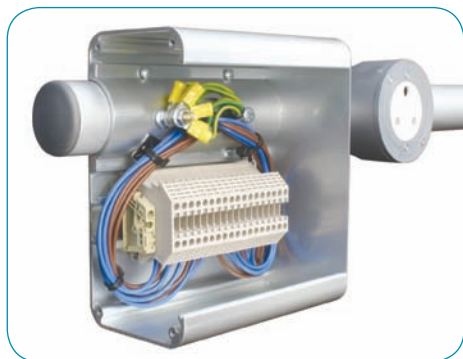

Extruded Side Mounted Terminal Box