

COPYRIGHT:

ALL ARTWORK, PICTURES AND TEXTS ARE COVERED BY OUR COPY-RIGHT.

THEY MUST NOT BE COPIED FOR REPRODUCTION (E.G. ON CD-ROM DISKS OR INTERNET-SITES) OR USED IN THEIR ENTIRE FORM OR IN EXCERPTS WITHOUT OUR PREVIOUS WRITTEN AGREEMENT.

IF YOU ARE DOWNLOADING PDF-FILES FROM OUR INTERNET HOME-PAGE FOR YOUR PERSONAL USE, MAKE SURE TO CHECK FOR UPDATED VERSIONS.

WE CANNOT TAKE ANY LIABILITY WHATSOEVER FOR DOWNLOADED FILES, AS TECHNICAL DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.


COPYRIGHT:

DIESE DRUCKSCHRIFT UND ALLE IHRE BESTANDTEILE IST URHEBERRECHTLICH GESCHÜTZT.

ABBILDUNGEN, GRAFISCHE DARSTELLUNGEN, TEXTE ODER DIE DRUCKSCHRIFT INSGESAMT ODER IN TEILEN DÜRFEN NICHT OHNE VORHERIGE SCHRIFTLICHE GENEHMIGUNG NACHGEDRUCKT ODER SONST REPRODUZIERT WERDEN (Z. B. AUF CD-ROM ODER IM INTERNET).

WENN SIE DIESE PDF-DATEI FÜR IHREN PERSÖNLICHEN GEBRAUCH VON UNSERER INTERNET-SEITE KOPIERT HABEN, MÖCHTEN WIR DARAUF HINWEISEN, DASS ALLE DORT ZUR VERFÜGUNG GESTELLTEN DATEIEN OHNE JEDEN WEITERN HINWEIS AUF DEN NEUSTEN TECHNISCHEN STAND GEBRACHT WERDEN. DIE ÄNDERUNG VON TECHNISCHEN DATEN UND LIEFERUMFANG IST DAHER VORBEHALTEN.

ARRI X

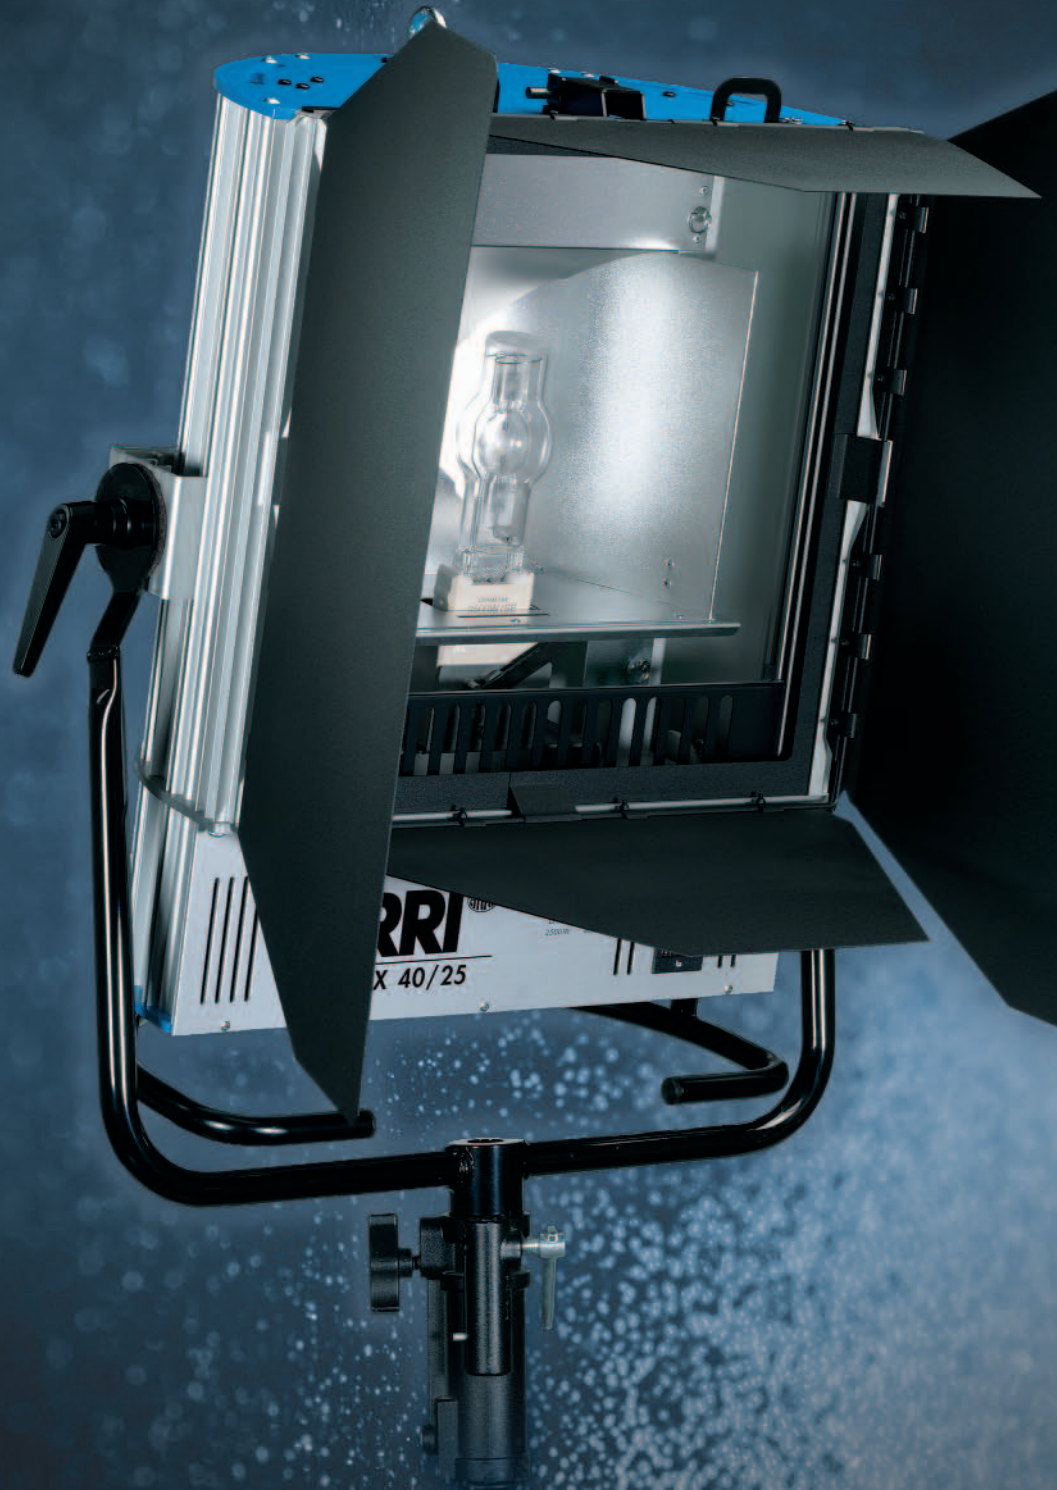

ARRI 

ARRI X DAYLIGHT LAMPHEADS



With the X series, ARRI offers a complete range of five high performance daylight floodlights to simplify lighting large areas evenly. The X Light is a super-wide floodlight with interchangeable reflectors. The silver reflector compensates for the drop in intensity that is always found further from the centre of a beam. Beam angles of around 120° or more allow flat surfaces such as buildings or scenic backings to be lit exceptionally evenly with a short throw. By lighting through a fabric, a soft source with no hot spot can be created. Alternatively, the silver reflector can be quickly exchanged without tools for a black panel - the 'black reflector' giving an extreme hard source for the 'arc light' look.

The dual wattage ARRI X40/25 has proved to be a success with applications as diverse as film, television, photography, theatre and event lighting. Now a whole family from 200W to 6kW is available. ARRI's elegant modular construction, using aluminium extrusions and lightweight pressure die-castings, offers great structural strength, while being light and weather-resistant. All servicable parts are readily accessible and all ARRI fixtures comply with the latest European safety standards.

The ARRI X lampheads utilise industry standard single-ended hot restrike HMI lamps. They are fully compatible with the range of ARRI electronic ballasts, and conventional magnetic ballasts from

575W to 6kW are also available. For use independently of the mains supply, ARRI provides electronic battery ballasts for the 200W, 575W and 1.2kW models.


For specific theatre requirements, the ARRI X40/25 model is also offered in a special Theatre version with a spill-eliminating front accessory cassette, ideal when using colour changers or shutters.

For the special demands of the event and exhibition lighting market, ARRI offers the ARRI X5 Event compatible with the Event multicore wiring system. Further information on this series is available in the separate "ARRI EVENT" brochure.


- Reflectors can be exchanged in seconds for even spread or hard shadow effect
- Outstanding wide spread with extremely even coverage
- Uses single-ended discharge lamps
- Compatible with all ARRI ballasts
- Sturdy, anti-corrosion aluminium construction
- 200W, 575W, 1.2kW, 2.5/4kW and 6kW power output
- Model X5 also available in an Event version
- Special Theatre version of the ARRI X40/25
- Optional frosted UV safety glass available
- Easy to use and maintain

For further information: www.arri.com

ARRI X2
200W



ARRI X5
575W

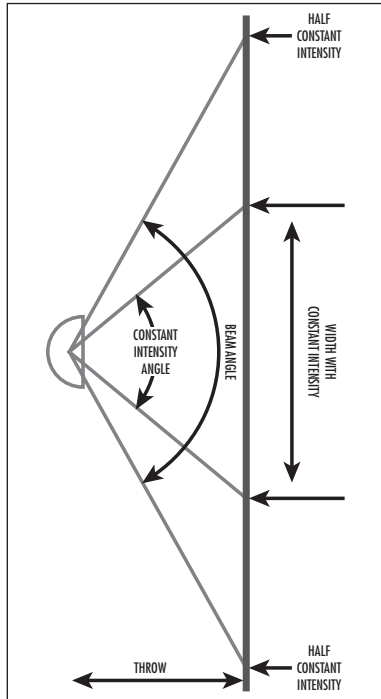

The ARRI X lights a flat surface evenly over a wide angle. Typically the light is even within 10 percent over 80 degrees of spread out of a total beam angle of 120 degrees.

Colours:


Manual: L0.82050.B

Lamphead complete with 4-leaf barndoor.

Technical Data:

Length (mm): 280H x 244W x 146L
 Weight (kg): 2.5
 Lamp: HMI 200W/SE
 Base: GY9.5

Light output (lux):

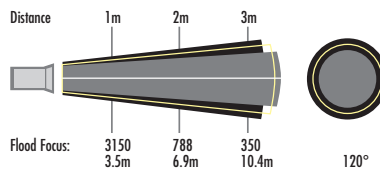

Accessories:

4-leaf barndoor,
L2.793880.0



Frosted safety glass with UV-protection
L2.82092.0



Reflector, black,
L2.82058.A



Head to ballast cable 7m
L2.73372.0



Kit Stand
LS.3



Electronic Ballasts:
 EB 125/200, 115/230V L2.76013.B
 EBB 125/200, Battery L2.76040.B
 EBB 200/400, Battery L2.76270.B



Colours:


Manual: L0.82200.B

Lamphead complete with 4-leaf barndoor.

Technical Data:

Length (mm): 372H x 376W x 208L
 Weight (kg): 8
 Lamp: HMI 575W/SE
 Base: G 22

Light output (lux):

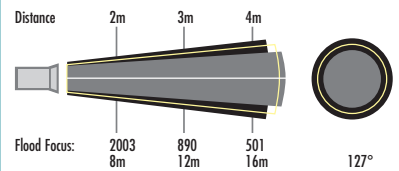

Accessories:

4-leaf barndoor,
L2.82240.0



Frosted safety glass with UV-protection
L2.82249.0



Reflector, black,
L2.82206.A




Softbox adapter
LG.RING245.X



Head to ballast cable 7m
L2.75600.0L
 Head to ballast cable 15m
L2.75600.CL



Universal stand
LS.5



Choke Ballasts:
 Choke Ballast 575W L2.75010.E

Electronic Ballasts:
 EB 400/575, 115/230V L2.76260.0
 EB 575/1200, 115/230V L2.76125.0
 EBB 575/1200, Battery L2.76230.0



1000 lux gives correct exposure for 200ASA film with aperture f4 at 24fps 1/48th sec.
 Photometric data according to ESTA standards.
 Data normalised to nominal lamp lumens.

In order to maintain the highest standards, ARRI reserves the right to alter specifications without notice.
 © ARRI (GB) Ltd

ARRI X12 1200W



Colours:


Manual: L0.82250.B

Lamphead complete with 4-leaf barndoor.

Technical Data:

Length (mm): 525H x 505W x 260L
 Weight (kg): 14
 Lamp: HMI 1200W/SE
 Base: G 38

Light output (lux):

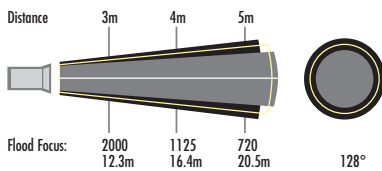

Accessories:

4-leaf barndoor,
L2.82775.0



Frosted safety glass with UV-protection
L2.82774.0




Reflector, black,
L2.82259.A



Head to ballast cable 7m,
L2.75600.0L
 Head to ballast cable 15m
L2.75600.CL



Universal stand
LS.5



Choke Ballasts:
Choke ballast 1200W L2.75012.E

Electronic Ballasts:
EB 575/1200, 115/230V L2.76125.0
 EBB 575/1200, battery L2.76230.0



ARRI X40/25 2500/4000W



Colours:


Manual: L0.82400.SC

Lamphead complete with 4-leaf barndoor.

Technical Data:

Length (mm): 635H x 590W x 290L
 Weight (kg): 22
 Lamp: HMI 2500/4000W/SE
 Base: G 38

Light output (lux):

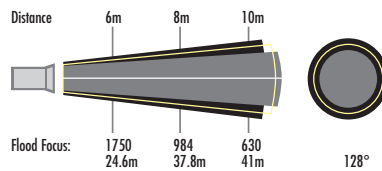

Accessories:

4-leaf barndoor,
L2.82717.0



Frosted safety glass with UV-protection
L2.82740.0




Reflector, black,
L2.82403.A



Head to ballast cable 7m
L2.75620.0L
 Head to ballast cable 15m
L2.75620.CL



Heavy duty wind-up stand
LS.387.S



Adaptor for choke ballast 2.5 kW:
L2.77440.0

Choke Ballasts:
Choke ballast 2.5kW L2.75014.E
 Choke ballast 4kW L2.75839.0

Electronic Ballasts:
EB 2.5/4kW, 230V L2.76640.0
 EB 2.5/4kW, 115/230V L2.76675.0



ARRI X60 6000W



Colours:


Manual: L0.82650.B

Lamphead complete with 4-leaf barndoor.

Technical Data:

Length (mm): 840H x 810W x 400L
 Weight (kg): 35.2
 Lamp: HMI 6000W/SE
 Base: G 38

Light output (lux):

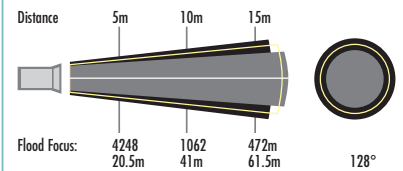

Accessories:

4-leaf barndoor,
L2.82675.0



Frosted safety glass with UV-protection
L2.82690.0




Reflector, black,
L2.82688.A



Head to ballast cable 7m
L2.75710.0L
 Head to ballast cable 15m
L2.75710.CL



Heavy duty wind-up stand
LS.387.S



Choke Ballasts:
Choke ballast 6kW L2.75841.0

Electronic Ballasts:
EB 6kW, Baby 230V L2.76193.0
 EB 6/12kW, 115/230V L2.76172.0



ARRI Original Accessories

- LS.635 Super Clamp, Quick Action
- LS.137 Swivelling "C" Clamp
- LE.6000.A Spigot 16 mm
- LS.137CB Safety Cable

Photometric Calculator

www.arri.com
 > products > lighting > support

ARRI X40/25 Theatre



ARRI X5 Event



ARRI X Ceramic 250



ARNOLD & RICHTER CINE TECHNIK

Lichttechnik, Pulvermühle,
83071 Stephanskirchen
Tel +49 80 36 3009 84
Fax +49 80 36 3009 79



ARRI LIGHTING SOLUTIONS GMBH

AGASTR. 24
D-12489 BERLIN
Tel +49 (0) 30 678-233-0
Fax +49 (0) 30 678-233-99

ARRI ITALIA S.r.l.

Viale Edison 318,
20099 Sesto S. Giovanni, Milano
Tel +39 02-26 22 71 75
Fax +39 02-242 16 92

ARRI INC. NEW YORK OFFICE

617 Route 303
Blauvelt, NY 10913-1109
Tel +1 845-353-14 00
Fax +1 845-425-12 50

ARRI CANADA Ltd.

415 Horner Avenue, Unit 11,
Etobicoke, Ontario, M8W 4W3,
Tel +1 416-255 33 35
Fax +1 416-255 33 99



ARRI (GB) Limited

2 Highbridge, Oxford Road, Uxbridge, Middlesex UB8 1LX

Tel: +44 (0)1895 457000 **Fax:** +44 (0)1895 457001

Email: sales@arri-gb.com **Web:** www.arri.com